

Roled Opto Electronics (China)Co.,Ltd
Http://www.roled.com.cn
Email:sensing@sensingm.com
Tel: 0573-84236688(-121) Fax:+86-0573-84882788
Address:No.8,HechuangRoad,HuimingStreet, JiashanCounty,Jiaxin City , Zhejiang Province.

ROLED

灯具名称: 投光灯
灯具描述: F1073B5-6-UN-PC-A3(15-OST-6RGBWA-AA.PP-50.CT)
报告编号: 电压(V): 219.5000
测试编号: 20211214001 电流(A): 0.2450
光源规格型号: OST 功率(W): 49.8000
每个光源光通量(lm) 功率因数: 0.9240
光源数量: 6 镇流器型号:
发光面长度(mm): 145 发光面宽度 (mm): 145
测试模式: C 发光面高度(mm): 0



光度结果

灯具光通量(lm): 2371.61
灯具效能(lm/w): 47.62
中心光强(cd): 18654.910
最大光强(cd): 19330.200
最大光强角度: $C=30.0$ $\gamma=2.0$
半峰边角(50%Imax): [C0/180]Total=15.8
 [C90/270]Total=23.5
光束扩散角(10%Imax): [C0/180]Total=29.6
 [C90/270]Total=31.8


测试设备: GMS1800
环境温度(°C): 25.0

测试日期: 2021/12/14
环境湿度(%): 60.0%

测试人员: anpeilou
测试距离(m): 8.76

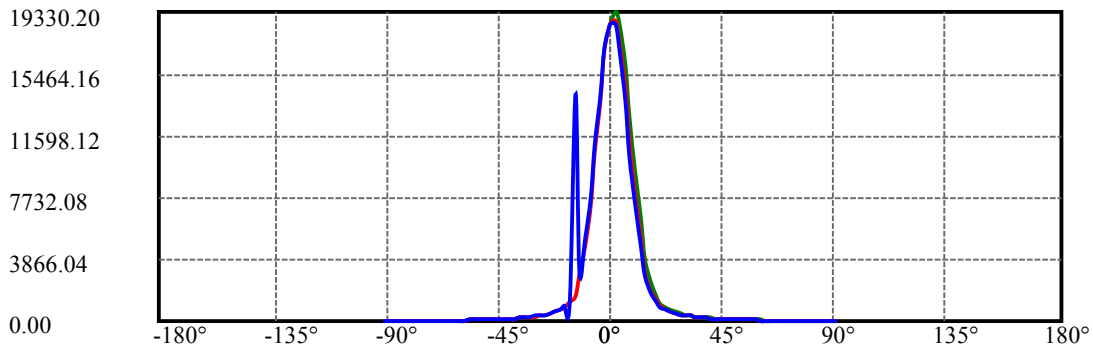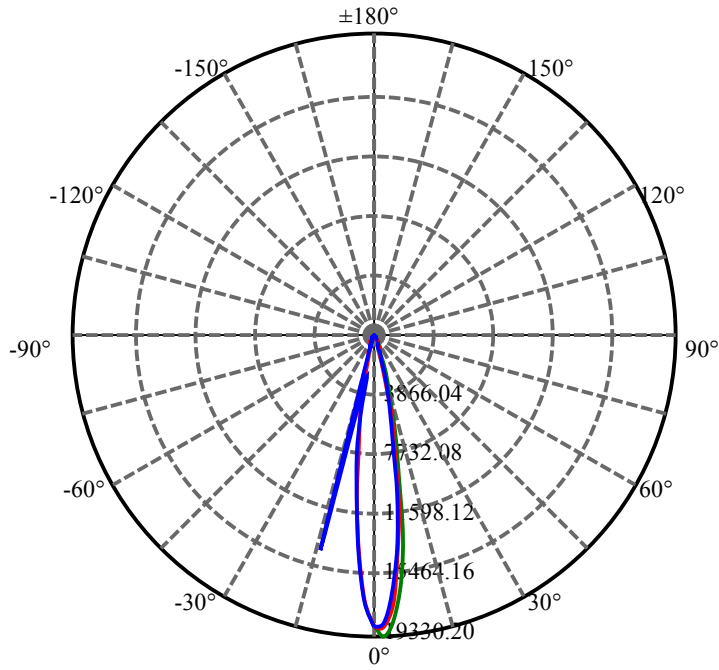


C30(Max): ———
C0/C180: ———
C90/C270: ———

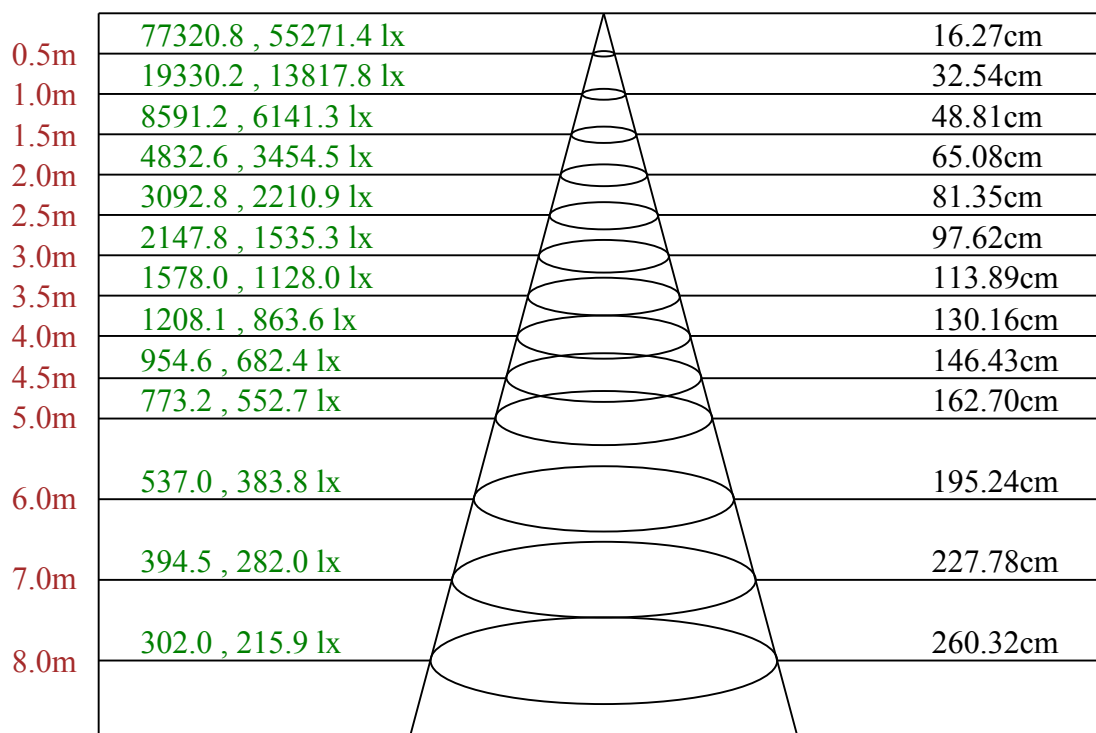

Max , Ave C30面光束角18.46

ROLED 投光灯
平面等照度曲线

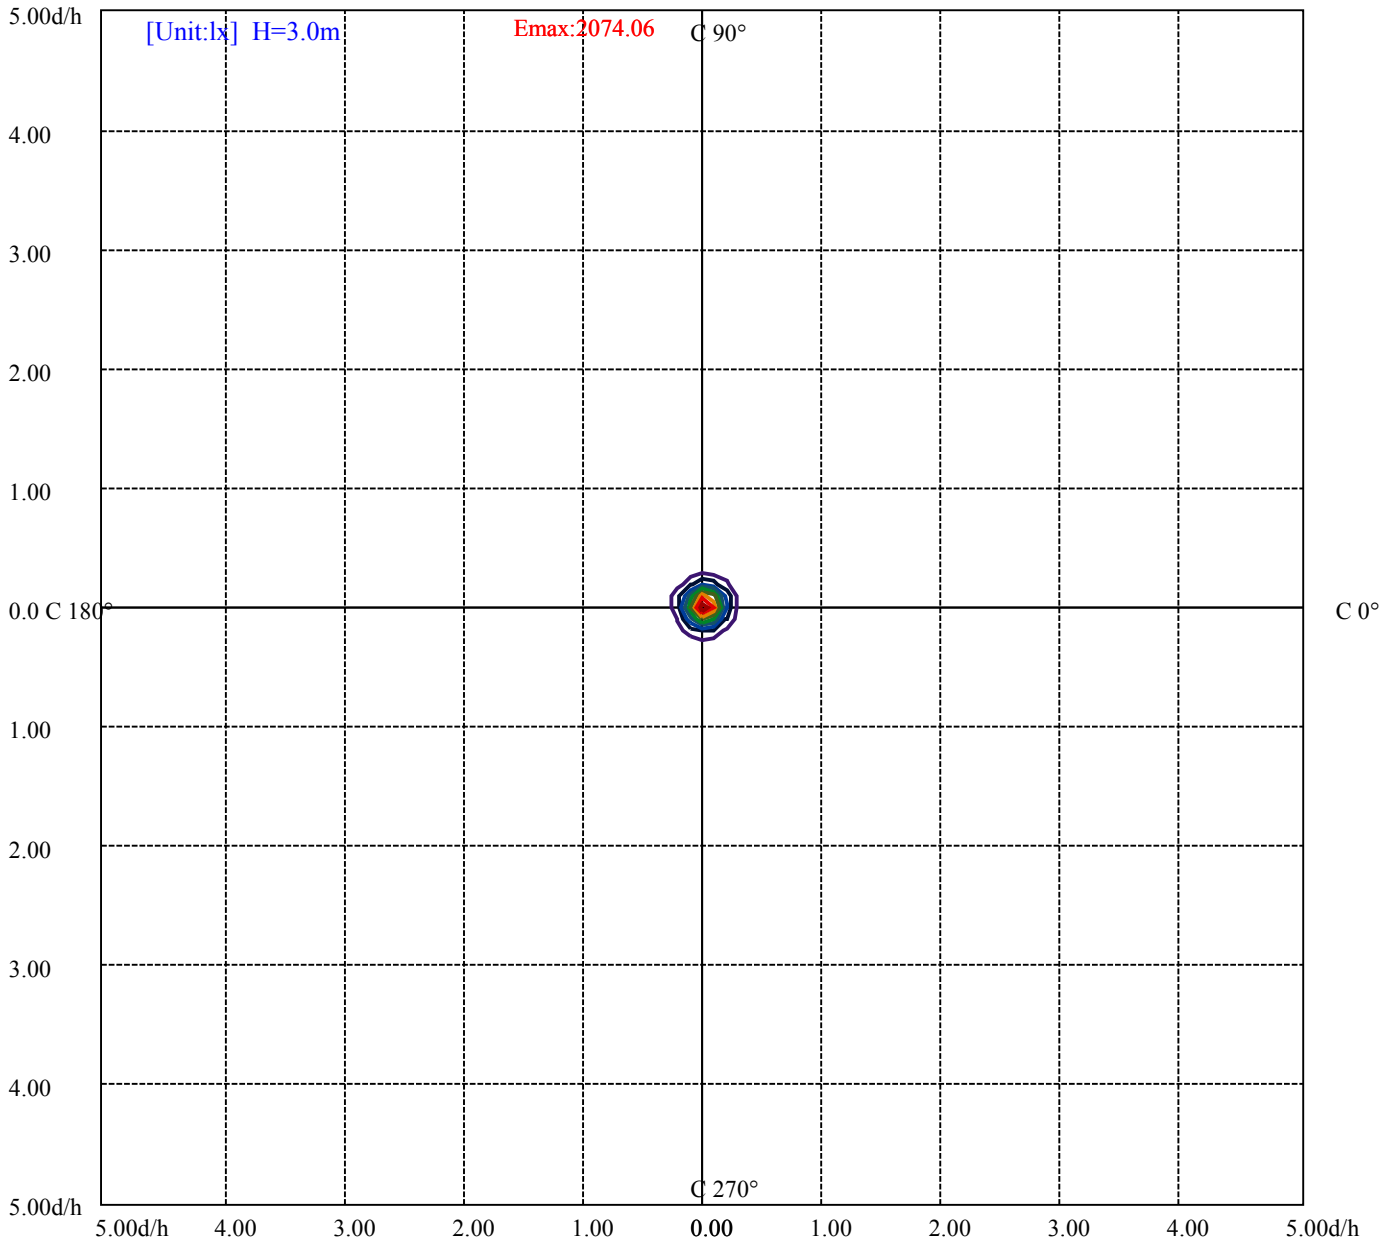

- (10%Emax) 207.4056
- (20%Emax) 414.8111
- (30%Emax) 622.2156
- (40%Emax) 829.6211
- (50%Emax) 1037.027
- (60%Emax) 1244.433
- (70%Emax) 1451.833
- (80%Emax) 1659.245
- (90%Emax) 1866.645

测试设备: GMS1800
环境温度(°C): 25.0

测试日期: 2021/12/14
环境湿度(%): 60.0%

测试人员: anpeilou
测试距离(m): 8.76

ROLED 投光灯

灯具的亮度限制曲线(灯具无发光侧边)

亮度值表


γ	45	50	55	60	65	70	75	80	85
C0	0	7262	0	5394	0	3031	0	1114	0
C45	0	0	0	0	0	0	0	0	0
C90	0	7206	0	5424	0	3073	0	841	0

L横(65)	L纵(65)	L45(65)	L横(75)	L纵(75)	L45(75)	L横(85)	L纵(85)	L45(85)
6317	6399	0	2538	2778	0	879	879	0

眩光等级表

眩光等级	质量等级	使用照度(lx)							
1.15	A	2000	1000	500	≤ 300				
1.5	B		2000	1000	500	≤ 300			
1.85	C			2000	1000	500	≤ 300		
2.2	D				2000	1000	500	≤ 300	
2.55	E					2000	1000	500	≤ 300
		a	b	c	d	e	f	g	h

亮度限制曲线

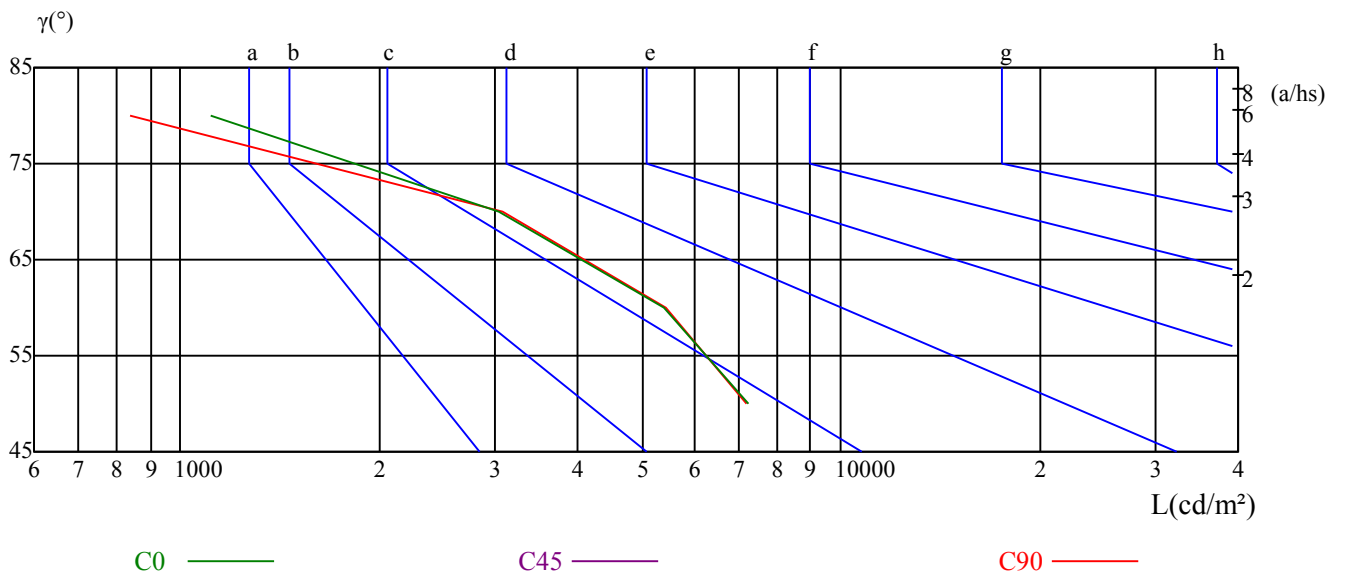

参照UGR的照射评估											
天花板反射率	70	70	50	50	30	70	70	50	50	30	
墙壁反射率	50	30	50	30	30	50	30	50	30	30	
地板反射率	20	20	20	20	20	20	20	20	20	20	
空间尺寸	Viewed crosswise					Viewed endwise					
X	Y										
2H	2H	9.57	10.56	9.93	10.87	11.19	9.58	10.57	9.94	10.88	11.20
	3H	10.21	11.08	10.59	11.42	11.79	10.22	11.09	10.60	11.43	11.80
	4H	10.27	11.08	10.68	11.44	11.83	10.28	11.09	10.69	11.45	11.84
	6H	10.22	10.96	10.64	11.34	11.74	10.24	10.98	10.66	11.35	11.75
	8H	10.17	10.87	10.61	11.26	11.67	10.19	10.89	10.63	11.28	11.69
	12H	10.12	10.79	10.56	11.17	11.60	10.14	10.80	10.58	11.19	11.62
4H	2H	9.76	10.57	10.16	10.92	11.31	9.76	10.58	10.17	10.93	11.32
	3H	10.49	11.15	10.90	11.56	11.96	10.52	11.18	10.93	11.59	11.99
	4H	10.57	11.16	11.01	11.59	12.03	10.60	11.19	11.04	11.62	12.06
	6H	10.54	11.04	11.01	11.49	11.97	10.57	11.07	11.04	11.53	12.00
	8H	10.48	10.95	10.96	11.40	11.87	10.52	10.98	10.99	11.44	11.91
	12H	10.43	10.83	10.92	11.32	11.80	10.46	10.87	10.96	11.36	11.83
8H	4H	10.50	10.97	10.98	11.42	11.90	10.53	11.00	11.01	11.45	11.92
	6H	10.47	10.84	10.98	11.35	11.83	10.50	10.87	11.01	11.38	11.86
	8H	10.42	10.75	10.96	11.27	11.77	10.45	10.78	10.99	11.30	11.80
	12H	11.11	11.39	11.64	11.89	12.47	11.17	11.46	11.70	11.95	12.53
12H	4H	10.44	10.85	10.94	11.34	11.81	10.47	10.87	10.96	11.36	11.84
	6H	10.67	10.74	10.95	11.21	11.76	10.70	10.77	10.98	11.24	11.79
	8H	10.38	10.66	10.90	11.16	11.74	10.41	10.69	10.93	11.19	11.77
对应照射距离，改变观察者位置S											
S = 1.0H	0.7/-1.0					0.7/-1.0					
S = 1.5H	1.5/-1.9					1.5/-1.9					
S = 2.0H	3.8/-2.8					3.7/-2.9					
标准表格	BK2					BK2					
更正系数	-2.8					-2.7					

ROLED 投光灯

光强数据表(cd)

附页 第7页 共8页

C/γ(°)	0.0	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0
0.0	18654.91	18739.32	17304.33	14480.39	11234.38	7888.63	5164.44	3130.89	1911.53
30.0	18570.50	19330.20	18432.37	15976.77	12884.24	9423.38	6430.61	3990.36	2486.30
60.0	18762.34	18877.45	17427.11	14595.49	11247.43	8100.42	5293.36	3311.99	2020.50
90.0	18654.91	18516.78	16751.82	13728.36	10359.58	7328.44	4680.99	2915.26	1789.52
120.0	18716.30	17772.43	15243.92	12439.16	9048.90	5946.40	3695.68	2286.01	1364.01
150.0	18770.02	17618.95	14933.14	11464.60	8157.21	5440.70	3959.66	1946.83	1272.31
180.0	18654.91	16959.01	13823.51	10507.68	7329.98	4639.56	2840.83	1501.99	1143.31
210.0	18570.50	15190.21	12934.89	9457.91	6448.26	3996.49	2464.81	1520.63	1088.98
240.0	18762.34	16920.64	13973.92	10413.29	7328.44	4604.26	2870.75	1786.45	1207.85
270.0	18654.91	17089.46	14222.55	11058.66	7757.40	5179.02	3121.69	14186.48	1257.27
300.0	18716.30	18094.73	15869.34	12723.09	9323.62	6353.87	3975.01	2451.77	1512.50
330.0	18770.02	18394.00	16575.32	13485.87	9975.12	6963.17	4433.13	2612.92	1521.63
360.0	18654.91	18739.32	17304.33	14480.39	11234.38	7888.63	5164.44	3130.89	1911.53
C/γ(°)	18.0	20.0	22.0	24.0	26.0	28.0	30.0	32.0	34.0
0.0	1263.10	917.01	718.26	583.21	483.45	409.78	350.08	300.35	259.45
30.0	1586.93	1138.79	860.23	682.96	568.63	484.21	412.08	341.94	293.29
60.0	1359.10	989.99	776.89	630.25	523.81	445.15	379.77	325.67	278.71
90.0	1199.41	897.83	701.38	570.16	475.77	407.48	350.15	305.88	269.50
120.0	982.70	749.96	598.71	494.42	419.75	357.90	312.25	272.34	235.43
150.0	909.34	710.59	564.79	471.94	399.04	346.16	300.81	264.13	228.06
180.0	844.80	670.76	544.84	461.12	394.43	339.41	296.67	256.76	219.09
210.0	827.15	663.63	545.68	459.43	394.12	339.49	294.75	249.70	216.48
240.0	913.94	719.03	582.44	491.12	415.15	354.68	307.03	264.28	226.76
270.0	934.66	723.10	593.03	494.04	415.92	354.53	307.10	262.06	227.60
300.0	1053.61	794.23	633.85	520.28	435.10	389.83	318.69	273.80	237.35
330.0	1122.29	828.46	660.94	540.00	448.76	380.39	328.05	281.17	243.64
360.0	1263.10	917.01	718.26	583.21	483.45	409.78	350.08	300.35	259.45
C/γ(°)	36.0	38.0	40.0	42.0	44.0	46.0	48.0	50.0	52.0
0.0	224.53	194.61	169.67	150.71	134.29	120.09	108.74	98.15	88.86
30.0	251.62	217.78	188.77	166.21	147.11	131.45	117.87	105.36	94.77
60.0	241.72	207.96	181.41	159.46	141.58	126.39	114.11	102.75	92.78
90.0	228.91	196.14	171.59	150.71	134.21	121.25	108.66	97.38	88.02
120.0	202.66	177.80	156.31	139.43	125.70	112.88	101.98	92.55	84.41
150.0	195.68	170.97	151.10	135.60	122.01	110.81	99.61	89.48	80.80
180.0	188.39	166.37	147.11	132.30	119.17	107.66	97.53	89.09	80.80
210.0	188.01	165.91	147.72	132.76	120.09	108.20	97.23	87.25	79.19
240.0	197.52	171.20	152.40	136.44	123.09	110.66	100.14	91.09	82.11
270.0	197.52	172.05	153.09	136.75	122.78	110.89	100.07	89.32	80.34
300.0	206.58	180.41	158.39	141.89	127.00	114.65	103.52	93.62	84.56
330.0	212.79	185.01	163.53	144.11	129.23	116.56	104.75	94.08	84.49
360.0	224.53	194.61	169.67	150.71	134.29	120.09	108.74	98.15	88.86
C/γ(°)	54.0	56.0	58.0	60.0	62.0	64.0	66.0	68.0	70.0
0.0	80.65	73.28	65.46	56.71	48.65	40.82	34.15	27.32	21.79
30.0	84.80	75.97	68.68	61.39	54.02	46.43	38.98	32.00	25.86
60.0	84.18	76.05	67.53	58.78	50.72	42.51	34.99	28.78	22.87
90.0	79.19	71.29	64.08	57.02	49.27	42.21	34.69	27.86	22.10
120.0	76.51	68.68	60.62	51.95	44.35	36.45	29.62	23.56	18.42
150.0	73.36	66.07	59.01	51.64	44.20	36.99	29.85	23.71	18.11
180.0	73.28	65.61	57.02	48.57	40.98	33.46	26.78	20.57	15.73
210.0	71.37	63.62	56.25	48.34	40.06	32.77	26.47	20.41	15.50
240.0	74.28	65.53	56.94	48.50	40.36	32.84	26.55	20.72	15.81
270.0	72.67	64.77	57.32	49.34	41.44	34.38	27.70	22.02	16.88
300.0	76.97	69.22	60.62	51.72	43.51	36.14	29.54	23.79	18.26
330.0	76.43	68.60	61.31	53.64	46.35	39.37	32.46	26.55	20.80
360.0	80.65	73.28	65.46	56.71	48.65	40.82	34.15	27.32	21.79

ROLED 投光灯

光强数据表(cd)

附页 第 8页 共8页

C/γ(°)	72.0	74.0	76.0	78.0	80.0	82.0	84.0	86.0	88.0
0.0	16.73	12.43	8.82	6.29	4.07	2.00	1.00	0.46	0.23
30.0	20.41	15.42	11.36	7.37	4.37	2.76	1.61	0.84	0.46
60.0	17.80	13.12	9.44	6.83	4.53	2.30	1.15	0.69	0.38
90.0	16.96	12.35	8.29	5.22	3.07	1.76	0.84	0.46	0.23
120.0	13.66	9.75	7.06	4.45	2.38	1.07	0.61	0.31	0.15
150.0	13.28	9.44	5.91	3.38	2.15	1.07	0.61	0.31	0.08
180.0	11.43	7.90	5.60	3.53	1.69	0.92	0.54	0.23	0.08
210.0	11.05	7.14	4.45	2.61	1.61	0.77	0.46	0.15	0.00
240.0	11.43	8.21	5.68	3.61	1.69	1.07	0.69	0.31	0.00
270.0	12.66	8.44	5.45	3.15	1.92	1.00	0.61	0.38	0.15
300.0	14.04	9.90	7.21	4.68	2.76	1.30	0.77	0.46	0.23
330.0	15.81	11.20	7.52	4.60	2.69	1.61	0.92	0.54	0.31
360.0	16.73	12.43	8.82	6.29	4.07	2.00	1.00	0.46	0.23
C/γ(°)	90.0								
0.0	0.15								
30.0	0.23								
60.0	0.15								
90.0	0.00								
120.0	0.00								
150.0	0.00								
180.0	0.00								
210.0	0.00								
240.0	0.00								
270.0	0.00								
300.0	0.00								
330.0	0.00								
360.0	0.15								